



A Subsidiary of **FREIGHTLINER**
LLC


XC- Series Motorhome Chassis

FEATURE

BENEFIT

- | | |
|--------------------------------------|---------------------------|
| ■ 3 Year, 50,000 Mile Warranty | Best in The Industry |
| ■ 9" 50,000 PSI Frame Rail | Solid Foundation |
| ■ 50 Degree Wheel Cut | Excellent Maneuverability |
| ■ Over 350 Dealers | Service Where You Need It |

2002 MODEL YEAR

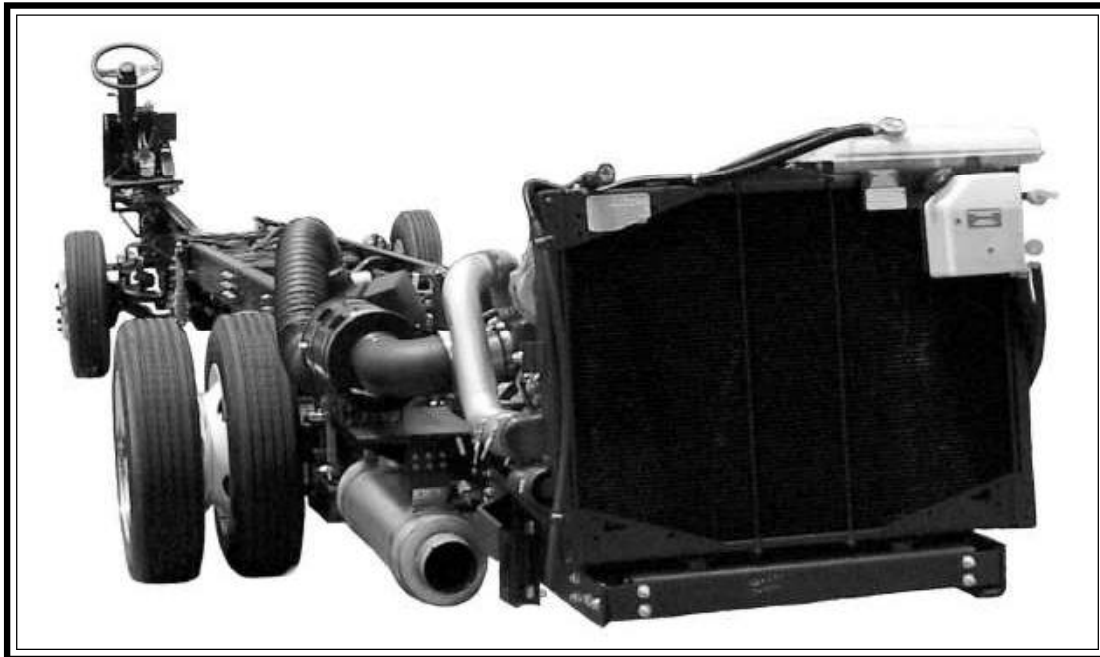

Land Yacht XC 360

by Airstream

Land Yacht XC 360 by Airstream Custom Chassis Features

- 13.2 CFM air compressor
- 70 in (1778 mm) front overhang
- Farr Eco-air cleaner
- Air filter restriction indicator
- Douglas tilt/telescoping steering column
- Fuel/water separator
- Michelin XRV 235/80R 22.5, LRG tires
- Heater hose assembly to front of chassis
- 1000 watt in-block engine heater
- Electronic cruise control with high idle
- Midland Pure Air Plus heated air dryer
- Push button shift control
- R-134A air conditioning compressor
- VIP steering wheel, 18 in (457 mm)
- Remote air fill kit
- Exhaust brake
- Polished aluminum wheels with trim kit

* Towing capacity limited by towing components and their attachment to the frame.

** Tire size may affect wheel cut.

For reference only. For certified dimensions, consult Freightliner Custom Chassis Corporation. Specifications are as of 5/04/01, and are subject to change without notice. Ratings are general guidelines. Illustrations may include optional equipment and accessories but may not include all standard equipment. To order more sales literature call 1-800-478-9805.



A Subsidiary of **FREIGHTLINER** LLC

XC-SERIES

Engine	Caterpillar 3126E turbocharged, aftercooled, 7.2 L electronic diesel 300 Hp @ 2,200 rpm 860 lb•ft (1166 N•m) @ 1,400 rpm
Transmission	Allison 3000 MH six-speed automatic with lock up
Gear Ratios	<u>First</u> <u>Second</u> <u>Third</u> <u>Fourth</u> <u>Fifth</u> <u>Sixth</u> <u>Rev.</u> 3.49:1 1.86:1 1.41:1 1.00:1 .75:1 .65:1 5.03:1
Vehicle Weight Ratings	Front GAWR 9,350 lb (4245 kg) Rear GAWR 17,000 lb (7718 kg) GVWR 26,350 lb (11 963 kg) GCWR* 36,350 lb (16 503 kg)
Wheelbase	228 in (5790 mm)
Front Axle	Meritor FD-965 I-Beam, wide track
Capacity	10,500 lb (4762 kg)
Track Width	81.9 in (2080 mm)
Rear Axle	Meritor RS-17-145
Drive Ratio	4.63:1
Capacity	17,500 lb (7945 kg)
Track Width	72.1 in (1830 mm)
Brakes	Full air brakes with auto slack adjusters and ABS
Front and Rear Service	15x4 in (front) and 16.5x7 in (rear) drum-style S-cam
Parking	Spring-applied, air release 16.5x7 in drum-style (rear axle) Push-pull lever controlled
Cooling System	
Radiator Core	2 rows, 15 FPI, 1050 in ² (6775 cm ²) area
Radiator Type	Cross-flow, rear mounted
Charge Air Cooler	Cross-flow
Transmission Oil Cooler	Remote mounted water-to-oil
Fan	Belt driven
Electrical System	
Alternator	Delco 130 amp, 22-SI
Starting	Delco 37MT, 12 volt
Battery	Two 760 CCA @ 0°F (-18°C); maintenance-free
Frame	Straight Frame Rail Construction
Max Resist. Bending Moment	291,000 lb•in (32 892 N•m)
Max Frame Section	9.00 x 2.75 x .25 in (229 x 70 x 6.4 mm)
Fuel Tank	90 gal (341 L), dual fuel fill
Steering System	TRW TAS 65, integral hydraulic power gear
Rating	12,000 lb (5448 kg)
Ratio	20.4:1
Pump	Gear-driven
Wheel Cut **	50°
Suspension	Neway air suspension
Shock Absorber	Tuned shocks, Bilstein
Heavy-Duty Stabilizer Bar Diam	1.50 in (38 mm) (front)
Tires	Michelin Radial XRV 235/80R 22.5, LRG
Wheels	(4) Aluminum (2) Steel 22.5x7.5 in (522x191 mm) with 10 bolt lugs 11.25 in (285.75 mm) diameter bolt center
Instrumentation	Gauges: Speedometer with Odometer • Tachometer • Engine Oil Pressure • Water Temperature • Voltmeter • Fuel Level • Dual Air Pressure